

m800

smaller. faster. better.

engine management system




in control



ENGINE MANAGEMENT

Since **MoTeC** was founded in 1987, the concept has been simple: build a business on the basis of providing quality products and services using the latest technology available. This philosophy of providing the best possible solutions, based on powerful hardware and easy to use software, has led to **MoTeC's** great successes, worldwide.

MoTeC combines innovative product designs with an outstanding package of total customer support and an exceptional two year product warranty. This has made **MoTeC** one of the world's leading providers of Engine Management and Data Acquisition systems.

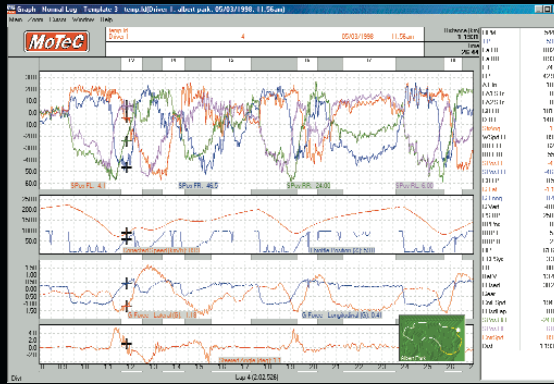

The main function of a programmable Engine Management System/ Engine Control Unit (ECU) is to provide full control of the engine over all possible ranges of operating conditions. At any given point (load/rpm site) the user is able

to precisely set the amount of fuel injected and the optimum ignition timing.

The number of sites over which the engine is tuned can also be chosen, allowing extra sites for fine-tuning in certain areas (if required).

It does this by taking measurements from a number of sensors, then uses the calibration data to make compensations to the basic engine map based on current operating conditions.

M800 ENGINE MANAGEMENT SYSTEM

The M800 offers the next generation in Engine Management Systems. This system has been developed through rigorous research and practical field-testing. The M800 retains all the best features of our previous ECUs, while offering a combination of unsurpassed power and flexibility.

smaller.


- Compact and lightweight, only 500 grams.
- Only half the weight and half the size of the previous generation ECU.

faster.

- Upgraded microprocessor and memory accelerates overall speed.
- A new generation time co-processor enhances control of Fuel and Ignition
- Leading edge processor means data can be logged at up to 200 samples per second.

better.

- A digital triggering system that is customisable and programmable to suit any engine and includes sophisticated diagnostics that monitor the quality of trigger signals.
- The M800 talks to most existing sensors within your vehicle, saving costly additions of new sensors.

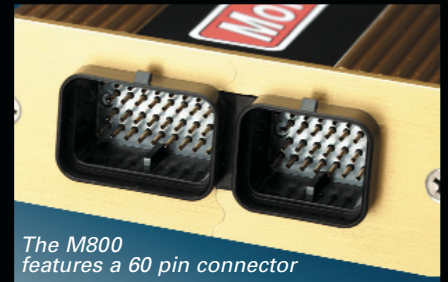

The M800 features a 60 pin connector

DIGITAL TRIGGERING SYSTEM

Flexibility – Programmable Trigger Levels: The DTS gives greater flexibility allowing the exact trigger levels to be set to suit the trigger sensor system. This ensures maximum compatibility with the trigger sensors.

Improved Noise Rejection – Programmable Filter Characteristics: Programmable filter characteristics allow the noise filter characteristics to be adjusted to suit the sensor system which gives improved noise rejection. This ensures the integrity of the trigger signals even in the most noisy environments.


Advanced Diagnostics: The DTS continuously monitors the quality of the trigger sensor signals and will give a warning if the quality of the signal is poor allowing trigger system problems to be rectified before they cause an operational problem.

Accuracy: Precision timing accuracy due to true zero crossing detection for magnetic trigger sensors.



M800 SOFTWARE

The M800 software has been designed with an emphasis on useability, which enables you to quickly optimise the setup of your vehicle. It is both user friendly for the beginner and a powerful tool for experts. All software is menu driven and has extensive help screens.

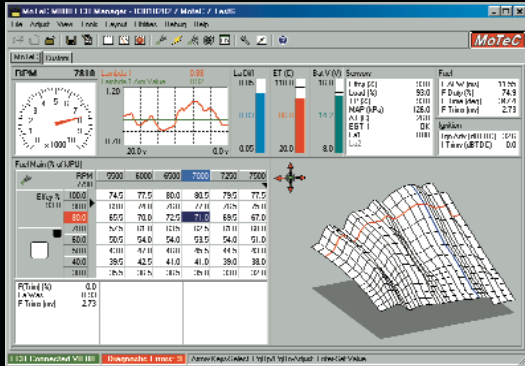


The key software is:

ECU Manager Tuning Software

The ECU Manager software is designed for setup, tuning and diagnostics of the M800. Tuning may be done on-line (with the ECU connected) or offline. The ECU Manager software allows viewing of all sensor readings, output settings, status reading, compensations and diagnostic errors.

Other features include: Quick Lambda (automated fuel adjustment), 3D graphing of calibration tables, site target, output testing, files comparison, user definable screen layouts, table inter-polation, table export, table mathematics and on-line help.

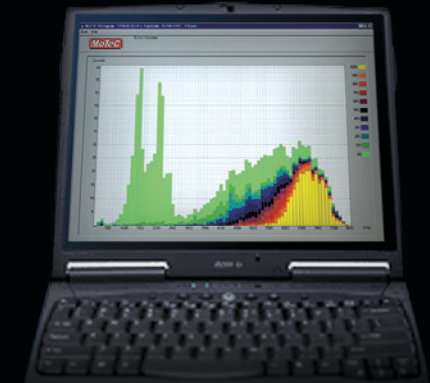

Interpret - Analysis

The Interpret software provides advanced tools to assist in analysing the logged data quickly and efficiently. Data can be collected from M800's internal log memory, by telemetry, or by direct connection to a PC. The information contained within the log files can be viewed numerically or graphically.

M800 UPGRADES

The M800 has various options which are field upgradable using a password and enabling system. Upgrade options include:

Logging

Gives you access to continuous recording of the operating parameters of the engine and vehicle including diagnostic features.

Pro Analysis

Enables advanced data analysis with Multiple Graph Overlays, XY Plots, Maths Functions, Virtual Instrument Display and Track Maps.



Wideband Lambda

(air fuel ratio)

Allows the use of NTK UEGO or Bosch LSU high accuracy Wideband Lambda sensors.

Telemetry

Enables the transmission of data from the M800, whilst in operation, to another point (e.g. the pits) in real time.

DIAGNOSTICS MONITORING SYSTEM

The diagnostics monitoring system monitors all aspects of the ECU operation, including: Advanced diagnostics on the Digital Trigger System.

Open Circuit and Short circuit detection on the Injector, Ignition and Auxiliary Outputs.

Sensor fault detection on the sensor inputs.

This system helps to identify many of the wiring and sensor faults that may occur during operation allowing problems to be fixed quickly, particularly when combined with the ECU's powerful data logging system.

INDIVIDUAL CURRENT SETTING OF INJECTORS

The current drive characteristics of each injector output is individually programmable. This allows different types of injectors to be used in Hi/Lo injector applications.



M800 ENGINE MANAGEMENT SYSTEM



INPUTS

Ref and Sync Trigger

- Magnetic Sensors (User Programmable Trigger Levels)
- Hall Sensors

6 Temperature Inputs

User Programmable as

- Engine Temperature
- Air Temperature
- Oil Temperature
- Other sensors configurable

8 Voltage Inputs

User Programmable as

- Map Sensor
- Mass Air Flow Sensor
- Gear Position
- Other sensors configurable

2 Lambda Sensor Inputs

User Programmable as

- Narrow Band and
- High Speed Wide Band

4 Digital Inputs

User Programmable as

- Wheel Speeds
- Nitrous Control
- Speed Limiting
- Other sensors configurable

POWER



COMMUNICATIONS

- CAN for diagnostics, tuning and logging retrieval
- RS232 for telemetry or device comms

OUTPUTS

8 (12) Fuel Injector Drivers

- Programmable Current Outputs
- Unused outputs can be used as Auxiliary Outputs
- Up to 8 low ohm injectors
- Up to 12 high ohm injectors

6 Ignition Drivers

- Up to 6 outputs for multi coil applications
- Unused outputs can be used as Auxiliary Outputs

8 Auxiliary Outputs

Programmable as

- Waste Gate Control
- Idle Up valves
- Fuel Pump Relay
- Stepper Motor Control
- Driver Warning Lights
- Additional Devices
- Drive by Wire
- CAM Control

Sensor Power Supply

- Separate Engine and Auxiliary Sensor Supplies

Also available in this range:

M880: Based on the M800 with an Autosport (military type) connector and 4 Mb of logging memory as an option.

MoTeC Support:

With **MoTeC** you can be assured of the highest level of customer support; our dealers are fully trained to the **MoTeC** standard and comprehensive information is provided at the **MoTeC** website (including downloadable diagrams, software and application notes). **MoTeC** also runs seminars with worldwide experts on engine management and data acquisition. All backed up by a full two year worldwide warranty.



ENGINE MANAGEMENT SYSTEMS	M800	M880	ENGINE MANAGEMENT SYSTEMS	M800	M880
GENERAL			BOOST CONTROL		
Microprocessor - 3.3V 32 Bit with next generation time co-processor and 32MHz internal operation	✓	✓	Main Table (3D) - RPM Sites x User Defined Sites	20 x11	20 x11
Quality Standard	ISO 9002	ISO 9002	Engine, Air & Exhaust Temperature Compensation	✓	✓
Manufacturing Standard - IPC-S-815-A Class 3 High Reliability	✓	✓	Auxiliary Compensation	1	1
Warranty Parts & Labour	2 year	2 year	TRIGGER SENSORS		
Burn in -10 to 70 Deg C for 32 hours	✓	✓	Directly Compatible with most OEM trigger systems including:		
ECU Control Software stored in updatable memory	✓	✓	Hall, Magnetic and Optical types		
High RFI Immunity	✓	✓	Multi-tooth (eg: Mazda and Toyota)		
Low heat generation	✓	✓	1 or 2 Missing Teeth (eg: Porsche)		
Battery transient protection	✓	✓	Many other special types including:		
Environmentally sealed electronics	✓	✓	Ford narrow tooth, Nissan optical, Harley Davidson		
Water-proof connector with gold plated contacts	✓	✓	Digital Signal Processing with Advanced Diagnostics		
Autosport connector	✗	✓	SENSOR INPUTS		
Case Size (mm)	147 x 105 x 40	147 x 105 x 40	Throttle Position, Manifold Pressure, Engine and Air Temperature		
Weight (kg)	0.500	0.525	Auxiliary Sensor Inputs		
Communication to PC or Dash Logger: - RS232 and CAN (PC via optional interface cable)3	✓	✓	Digital/Speed Inputs		
Cylinders	1,2,3,4,5,6,8,10,12	1,2,3,4,5,6,8,10,12	AIR FUEL RATIO INPUTS		
Engines 2 stroke, 4 stroke, Rotary (1 to 4)	✓	✓	Narrow Band Air Fuel Ratio		
Maximum RPM	> 20,000	> 20,000	Wideband Air Fuel Ratio - High Speed, Temperature Compensated		
OPERATING CONDITION			NTK or Bosch LSU Type		
Internal Temperature Range (Deg C)	-10 ~ 85 Deg	-10 ~ 85 Deg	Range - Lambda		
Ambient Temperature (Deg C) (Depending on load & ventilation)	-10 ~ 70 Deg	-10 ~ 70 Deg	Resolution - Lambda		
Operating Voltage	6 ~ 22V DC	6 ~ 22V DC	Useable as Auxillary Sensor Inputs		
Operating Current (ECU only)	0.5 A max.	0.5 A max.	DATA LOGGING		
Reverse Battery Protection	External Fuse	External Fuse	Allows Logging of all ECU parameters		
COMPUTER SOFTWARE			Memory Size		
Tuning, setup, diagnostic & utility software	✓	✓	Individual Parameter & Rate Selection		
Computer Requirements	IBM PC with printer port, Win 95 to XP	IBM PC with printer port, Win 95 to XP	Logging Rate - (samples per second)		
Built-in help system	✓	✓	Logging Time - 28 Par. + Diag. at 5/sec		
Basic Data Logging Analysis	Opt. 1	Opt. 1	Interpret Software - Graphical Analysis		
Advanced Analysis Software: Multiple Graph Overlays, XY Plots, Maths Functions, Virtual Instrument Display, Track Maps	Opt. 3	Opt. 3	- Advanced Analysis		
INJECTION			Maximum parameters logged		
Type	Sequential	Sequential	Maximum logging throughput		
Number	8 low ohm, 12 high ohm (Opt.6)	8 low ohm, 12 high ohm (Opt.6)	SPECIAL FUNCTIONS		
User Programmable Current	0.5 ~ 6 Amp peak	0.5 ~ 6 Amp peak	CAM Control		
Individual Programmable Peak Current	✓	✓	Drive by Wire		
Individual Programmable Hold Current	✓	✓	Traction Control & Launch Control		
User Definable Battery Compensation	✓	✓	Narrow Band Lambda Control		
FUEL CALIBRATION			Wideband Lambda Control		
Accuracy	0.00001 sec	0.00001 sec	Gear Change Ignition Cut		
RPM & Load Sites are user programmable	✓	✓	Boost Enhancement (Anti-lag)		
Main Table (3D) - RPM sites x Load sites	40 x 21	40 x 21	Warning Alarms (Sensor HI / LO)		
End of Injection Primary & Secondary (3D) - RPM sites x Load sites	20 x 11	20 x 11	Gear Detection		
Individual Cylinder Trim	✓	✓	Ground Speed Limiting		
Individual Cylinder Tables (3D) - RPM sites x Load sites	20 x 11	20 x 11	Dual RPM Limit		
Secondary Injector Balance Table (3D) - RPM sites x Load sites	20 x 11	20 x 11	Nitrous Oxide Enrich / Retard		
Adjustable MAP, Engine & Air Temperature Compensations	✓	✓	Air Conditioner Request		
Auxiliary Compensations	5	5	Over Run Fuel Cut		
Gear Compensation	✓	✓	Standard Sensor Calibrations		
Accel./Deccel. Clamp, Decay & Sensitivity	✓	✓	Programmable Sensor Calibrations		
Cold Start (5 parameters)	✓	✓	RPM Limit, Hard or Soft cut, fuel and/ or ignition		
Multi Pulse	Opt. 9	Opt. 9	OUTPUTS		
IGNITION OUTPUTS			Number of Auxiliary		
Number	6	6	All outputs are PWM or switched capable		
1 output may drive up to 8 coils using the MoTeC Ignition Expander or CDI	✓	✓	4 Wire Stepper Motor Capable		
Ignition Interface allows connection to most OEM Ignition systems	✓	✓	Number of Outputs with High and Low Side drive		
IGNITION CALIBRATION			Auxiliary Outputs can be used for:		
Accuracy	0.25 degree	0.25 degree	Turbo Wastegate Control, Idle Speed Control		
RPM & Load Sites are user programmable	✓	✓	Fuel Used Output, Tacho Output		
Main Table (3D) - RPM sites x Load sites	40 x 21	40 x 21	Shift Light, Driver Warning Alarm		
Individual Cylinder Trim	✓	✓	RPM / Load dependent device		
Individual Cylinder Tables (3D) - RPM sites x Load sites	20 x 11	20 x 11	User definable Table (20x11) with selectable axis parameters		
Adjustable MAP, Engine & Air Temperature Compensations	✓	✓	Slip Warning, Fuel Pump Relay		
Auxiliary Compensations	5	5	Thermatic Fan, Air Conditioner Fan and Clutch		
Gear Compensation	✓	✓	Unused Injector Outputs may be used for general functions as per Auxiliary outputs		
Accel. Adv. Clamp, Decay & Sensitivity	✓	✓	Unused Ignition Outputs may be used for general functions		
Dwell Time - RPM x Battery Voltage	10 x 11	10 x 11	DIAGNOSTICS		
Odd Fire engine capability	✓	✓	Injectors Open Circuit, Short Circuit, Peak Current not reached		
Rotary Ignition Split	✓	✓	Sensors Open & Short Circuit		
Multi Spark	Opt. 9	Opt. 9	Ref/Sync noise warning & error diagnostics (noise, runt pulses and amplitude)		
TELEMETRY LINK			Operating Errors: RPM Limit Exceeding, Injector overduity, Over Boost, Low Battery, REF Error etc.		
			Allows real time monitoring & data acquisition via a telemetry link		
			Opt. 4	Opt. 4	

✓: Standard ✗: Not available Opt.1: Logging Opt.2: Lambda Single or Dual Opt.3: Pro Logging Opt.4: Telemetry Opt.5: Advanced Functions Opt.6: 10/12 Cylinder Opt.7: CAM Control Opt.8: Drive by Wire Opt.9: Multi Spark

Specifications are subject to change without notification. © MoTeC Pty Ltd 2003



www.motec.com.au

MoTeC Research Centre

121 Merrindale Drive Croydon South, 3136 Victoria, Australia
Tel: 61 3 9761 5050 Fax: 61 3 9761 5051

MoTeC Europe Ltd

Unit 14, Twyford Mill Industrial Estate, Oxford Rd Adderbury
Nr Banbury, Oxon, UK OX17 3HJ
Tel: 44 8700 119 100 Fax: 44 8700 111 922

MoTeC Systems USA

5355 Industrial Drive Huntington Beach California, 92649 U.S.A
Tel: 1 714 895 7001 Fax: 1 714 897 8782

MoTeC Systems East

169-2 Gasoline Alley Mooresville, NC 28117, USA
Tel: 1 704 799 3800 Fax: 1 704 7993874



For more information, contact your local MoTeC dealer



AUSTRALIA

EUROPE

USA

ASIA

Over 50 countries